



The brand of choice for log home & timber frame construction.

- Premium 2" T&G for exposed ceiling and floors.
- Certified Western SPF and Douglas Fir substrate provide superior stability and strength.
- Profiled from Appearance Grade lumber for a clean, consistent look.
- Precision-milled for a consistent, secure fit.
- Available in long lengths for fewer seams.

DAK DECK

2" T&G



Scan for more info



WC200



SISV4E







Best used for:

- Exposed wall and ceilings in timber frame and post-and-beam construction
- Interior loft floors and mezzanines where structural decking is required
- Covered outdoor living areas requiring a thicker, more substantial profile

WC200

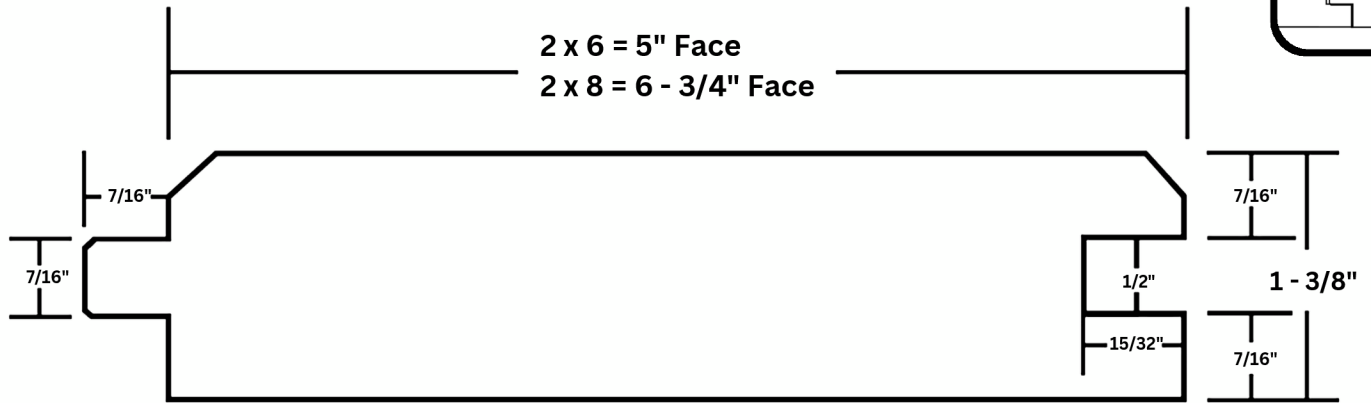

S1SV4E (Resawn 1 Face)

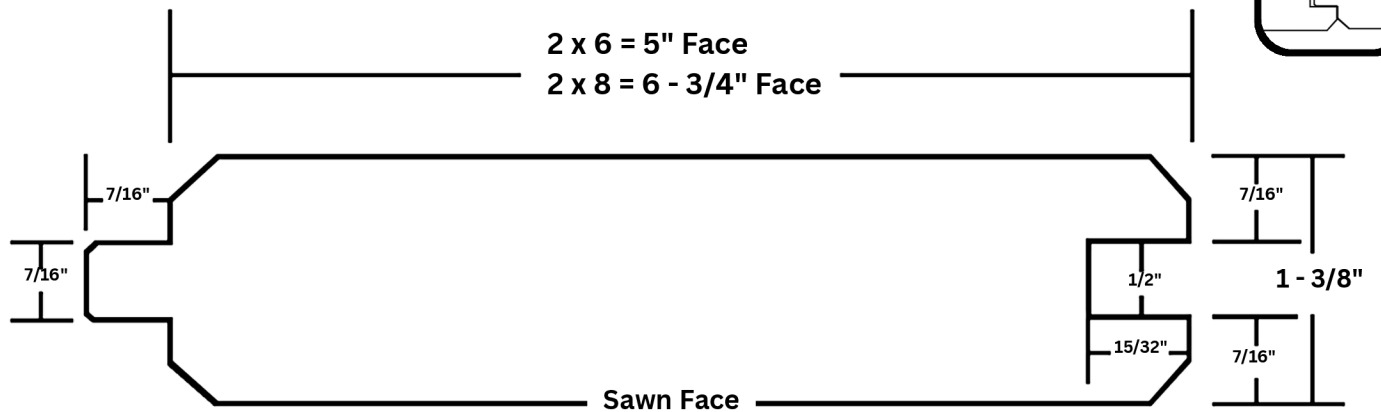

PRODUCT	LENGTHS	PATTERNS	PACK SIZE
SPF 2 x 6	8' - 20'	S1SV4E Premium Select T&G WC200 Premium Select T&G	S1SV4E - 90 pc WC200 - 189 pc
SPF 2 x 8	8' - 20'	S1SV4E Premium Select T&G WC200 Premium Select T&G	S1SV4E - 70 pc WC200 - 147 pc
Dfir 2 x 6	8' - 20'	S1SV4E Premium Select T&G WC200 Premium Select T&G	S1SV4E - 90 pc WC200 - 189 pc



(604) 986-0323



specialties@dakeryn.com